Mechanical rigid stem melt pressure gauge
PT124Y-610

PT124Y-610

Description

PT124Y-610 model adopts the original German packaging machine stamen, and designed with all stainless steel structure, isolated diaphragm and local index display. With dial plate's step-up and stem-down versions, the gauge head can be rotated 360° for unobstructed viewing.

Application

It can be widely used in chemical fibre and filature, rubber & plastic machinery, and other equipment of high temperature steam.

Ordering Guide

Model	Range	Snout	Process connection	Other requirement
PT124Y-610	---	---	---	---
Example : PT124Y-610-350Bar-6″-1/2-20UNF				

Dimensions

PT124Y-610

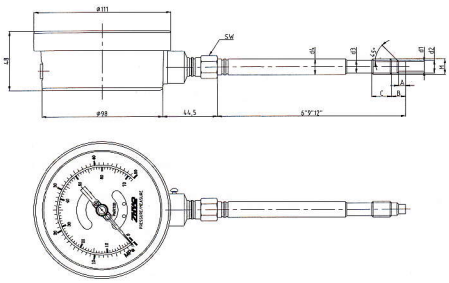



Specifications

- **Pressure range:** 0-1MPa~0~150MPa
- **Diameter:** 100mm
- **Accuracy:** 1.6%FS
- **Needle sweep:** 270°
- **Max diaphragm temperature:** 350°
- **Diaphragm material:** 15-5PH
- **Case material:** Stainless steel with safety glass
- **Pressure connector:** 1/2-20UNF, M22×1.5, G1/2, G3/4

(Optional)