




Electrical contact rigid stem pressure gauge PT124Y-613

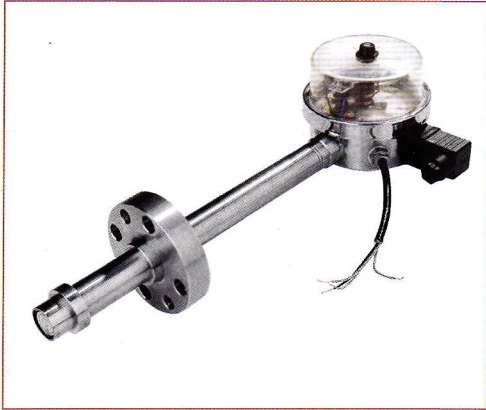

PT124y-613

Description

PT124Y-613 adopts the original packaging machine stamen with signal and electric contact output, and designed with all stainless steel structure, isolated diaphragm and local index display. With dial plate's step-up and stem-down versions, the gauge head can be rotated 360° for unobstructed viewing.

Application



It can be widely used in chemical fibre and filature, rubber & plastic machinery, and other equipment of high temperature steam.

Ordering Guide

Model	Range	Output	Snout	Process connection	Other requirement
PT124Y-613	---	---	---	---	---
Example : PT124Y-613-350Bar-6"-1/2-20UNF					

Dimensions

PT124Y-613

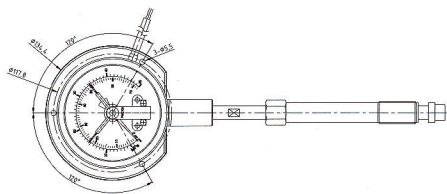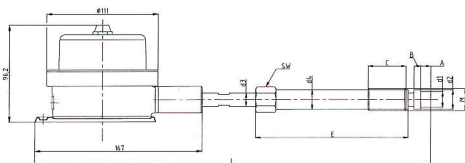

Model	A	B	C	d1	d2	d3	d4	e1	e2	e3	e4	e5	e6	e7	Sw	L1	L2	L3	L4	L5	L6	L7
M2-15	9.8	6.8	38	φ16.6	φ19.5	φ13.5	φ18.6	φ2	200	250	300	400	420	440	22	380	430	480	530	620	650	710
G3/4	18	13.0	48	φ17.8	φ23.5	φ15.2	φ23.5								36							

Specifications

- **Pressure range:** 0-1MPa~0-200MPa
- **Output:** Contact switch signal
- **Diameter:** 100mm
- **Accuracy:** 1.6%FS
- **Needle sweep:** 270°
- **Max diaphragm temperature:** 350°C
- **Diaphragm material:** 15-5PH
- **Case material:** Stainless steel with safety glass
- **Pressure connector:** 1/2-20UNF, M22 × 1.5, G1/2, G3/4

(Optional)