



DMK 331

Industrial Pressure Transmitter

Ceramic Sensor

accuracy according to IEC 60770:
0.5 % FSO

Nominal pressure

from 0 ... 400 mbar up to 0 ... 600 bar

Output signals

2-wire: 4 ... 20 mA

3-wire: 0 ... 20 mA / 0 ... 10 V

others on request

Special characteristics

- ▶ pressure port G 1/2" flush for pasty and polluted media
- ▶ pressure port G 1/2" open port PVDF for aggressive media
- ▶ oxygen application

Optional versions

- ▶ IS-version
Ex ia = intrinsically safe for gases and dusts
- ▶ SIL 2
according to IEC 61508 / IEC 61511
- ▶ customer specific versions

The industrial pressure transmitter DMK 331 with ceramic sensor has been especially designed for pasty, polluted or aggressive media and for oxygen applications at low pressure range.

As with all industrial pressure transmitters made by BD|SENSORS, you may choose between various electrical and mechanical connections also on DMK 331.

Preferred areas of use are


-  Plant and machine engineering
-  Energy industry
-  Environmental engineering
(water - sewage - recycling)
-  Medical technology




Input pressure range ¹																				
Nominal pressure gauge	[bar]	-1...0	0.4	0.6	1	1,6	2,5	4	6	10	16	25	40	60	100	160	250	400	600	
Nominal pressure abs.	[bar]	-	-	0.6	1	1,6	2,5	4	6	10	16	25	40	60	100	160	250	400	600	
Overpressure	[bar]	4	1	2	2	4	4	10	10	20	40	40	100	100	200	400	400	600	800	
Burst pressure ≥	[bar]	7	2	4	4	5	7,5	12	18	30	50	75	120	180	300	500	750	1000	1100	
Vacuum resistance		P _N ≥ 1 bar: unlimited vacuum resistance										P _N < 1 bar: on request								
¹ PVDF pressure port possible for nominal pressure ranges up to 60 bar																				
Output signal / Supply																				
Standard	2-wire: 4 ... 20 mA / V _S = 8 ... 32 V _{DC}										SIL-version: V _S = 14 ... 28 V _{DC}									
Option IS-protection	2-wire: 4 ... 20 mA / V _S = 10 ... 28 V _{DC}										SIL-version: V _S = 14 ... 28 V _{DC}									
Options 3-wire	3-wire: 0 ... 20 mA / V _S = 14 ... 30 V _{DC} 0 ... 10 V / V _S = 14 ... 30 V _{DC}																			
Performance																				
Accuracy ²	≤ ± 0.5 % FSO																			
Permissible load	current 2-wire: R _{max} = [(V _S – V _{S min}) / 0.02 A] Ω voltage 3-wire: R _{min} = 10 kΩ										current 3-wire: R _{max} = 240 Ω									
Influence effects	supply: 0.05 % FSO / 10 V										load: 0.05 % FSO / kΩ									
Long term stability	≤ ± 0.3 % FSO / year at reference conditions																			
Response time	2-wire: ≤ 10 msec										3-wire: ≤ 3 msec									
² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)																				
Thermal effects (Offset and Span) / Permissible temperatures																				
Thermal error	≤ ± 0.2 % FSO / 10 K																			
in compensated range	-25 ... 85 °C																			
Permissible temperatures ³	medium: -40 ... 125 °C					electronics / environment: -40 ... 85 °C					storage: -40 ... 100 °C									
³ for pressure port of PVDF the minimum temperature is -30 °C																				
Electrical protection																				
Short-circuit protection	permanent																			
Reverse polarity protection	no damage, but also no function																			
Electromagnetic compatibility	emission and immunity according to EN 61326																			
Mechanical stability																				
Vibration	10 g RMS (25 ... 2000 Hz)										according to DIN EN 60068-2-6									
Shock	500 g / 1 msec										according to DIN EN 60068-2-27									
Materials																				
Pressure port	standard: stainless steel 1.4404 (316 L) optional for G1/2" open port with nominal pressure range up to 60 bar: PVDF others on request																			
Housing	stainless steel 1.4404 (316 L)																			
Option compact field housing	stainless steel 1.4301 (304); cable gland M12x1.5, brass, nickel plated (clamping range 2 ... 8 mm)																			
Seals	standard: FKM option: EPDM (for P _N ≤ 160 bar) others on request																			
Diaphragm	ceramic Al ₂ O ₃ 96 %																			
Media wetted parts	pressure port, seals, diaphragm																			
Explosion protection (only for 4 ... 20 mA / 2-wire)																				
Approval DX19-DMK 331	IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X stainless steel pressure port: zone 0: II 1G Ex ia IIC T4 Ga zone 20: II 1D Ex ia IIIC T 85°C Da plastic pressure port: zone 1: II 2G Ex ia IIC T4 Gb zone 21: II 2D Ex ia IIIC T 85°C Db																			
Safety technical maximum values	U _i = 28 V _{DC} , I _i = 93 mA, P _i = 660 mW, C _i ≈ 0 nF, L _i ≈ 0 μH, the supply connections have an inner capacity of max. 27 nF to the housing																			
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with p _{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: -20 ... 70 °C																			
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1μH/m																			
Miscellaneous																				
Option SIL2 version ⁴	according to IEC 61508 / IEC 61511																			
Option oxygen application	for P _N ≤ 25 bar: O-ring in FKM Vi 567 (with BAM-approval); permissible maximum values are 25 bar / 150° C																			
Current consumption	signal output current: max. 25 mA										signal output voltage: max. 7 mA									
Weight	approx. 140 g																			
Installation position	any																			
Operational life	100 million load cycles																			
CE-conformity	EMC Directive: 2014/30/EU										Pressure Equipment Directive: 2014/68/EU (module A) ⁵									
ATEX Directive	2014/34/EU																			
⁴ only for 4 ... 20 mA / 2-wire																				
⁵ this directive is only valid for devices with maximum permissible overpressure > 200 bar																				

Wiring diagrams

2-wire-system (current)

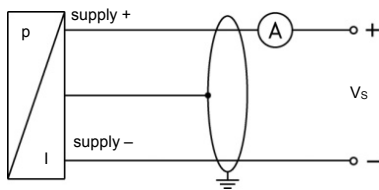

3-wire-system (current / voltage)


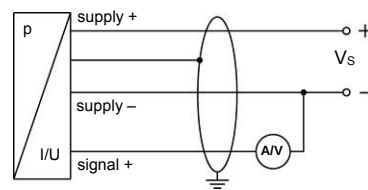


Pin configuration

Electrical connection	ISO 4400	Binder 723 (5-pin)	M12x1 / metal (4-pin)	compact field housing	cable colour (IEC 60757)
Supply +	1	3	1	IN +	WH (white)
Supply -	2	4	2	IN -	BN (brown)
Signal + (only for 3-wire)	3	1	3	OUT+	GN (green)
Shield	ground pin $\oplus$	5	4	$\oplus$	GNYE (green-yellow)



Electrical connections (dimensions in mm)

standard





ISO 4400
(IP 65)


options




Binder Series 723 5-pin
(IP 67)




M12x1 4-pin
(IP 67)



compact field housing
(IP 67)



cable outlet with PVC cable
(IP 67) ⁶



cable outlet, cable with
ventilation tube (IP 68) ⁷


⇒ universal field housing stainless steel 1.4404 (316 L) with cable gland M20x1.5 (ordering code 880) and other versions on request

⁶ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C)

⁷ different cable types and lengths available, permissible temperature depends on kind of cable


Mechanical connection (dimensions in mm)

standard

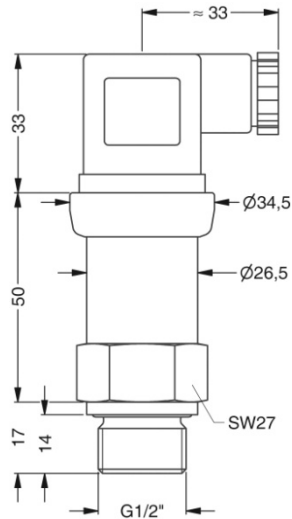


G1/2" DIN 3852
with ISO 4400

standard for SIL- and SIL-IS-version

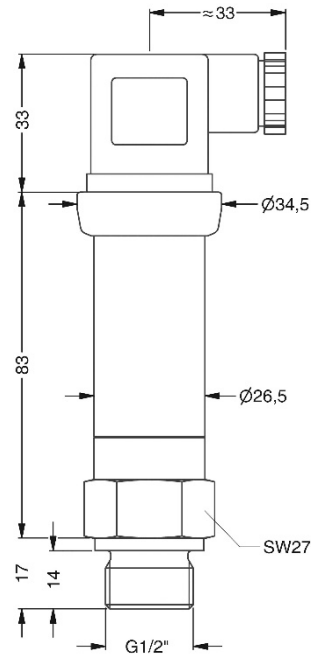


G1/2" DIN 3852
with ISO 4400


options




G1/2" EN 837




G1/2" open port

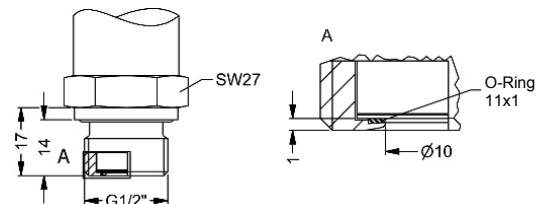


G1/2" semi-flush DIN 3852; M20x1.5⁸




G1/4" DIN 3852



G1/4" EN 837



1/2" NPT



1/4" NPT

⇒ metric threads and other versions on request

⁸ possible for nominal pressure ranges $P_N \leq 25$ bar; absolute pressure ranges on request

Ordering code DMK 331

DMK 331

[illegible][illegible]

¹ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C); others on request

² code TR0 = PVC cable, cable with ventilation tube available in different types and lengths

³ metric threads and others on request

⁴ possible for nominal pressure ranges $P_N \leq 25$ bar; absolute pressure ranges on request

⁵ possible for nominal pressure range $P_N \leq 160$ bar

⁶ PVDF only with G1/2" DIN 3852 open pressure port (up to 60 bar), minimum permissible temperature is -30 °C

⁷ oxygen application with FKM-seal up to 25 bar possible