



Highly accurate, general-purpose PD flowmeter




ULTRA OVAL SERIES




Use the oval rotors, the heart of the OVAL flowmeters, field proven for accuracy and long life.

A total of 17 models from Sizes 39 through 65 the line.

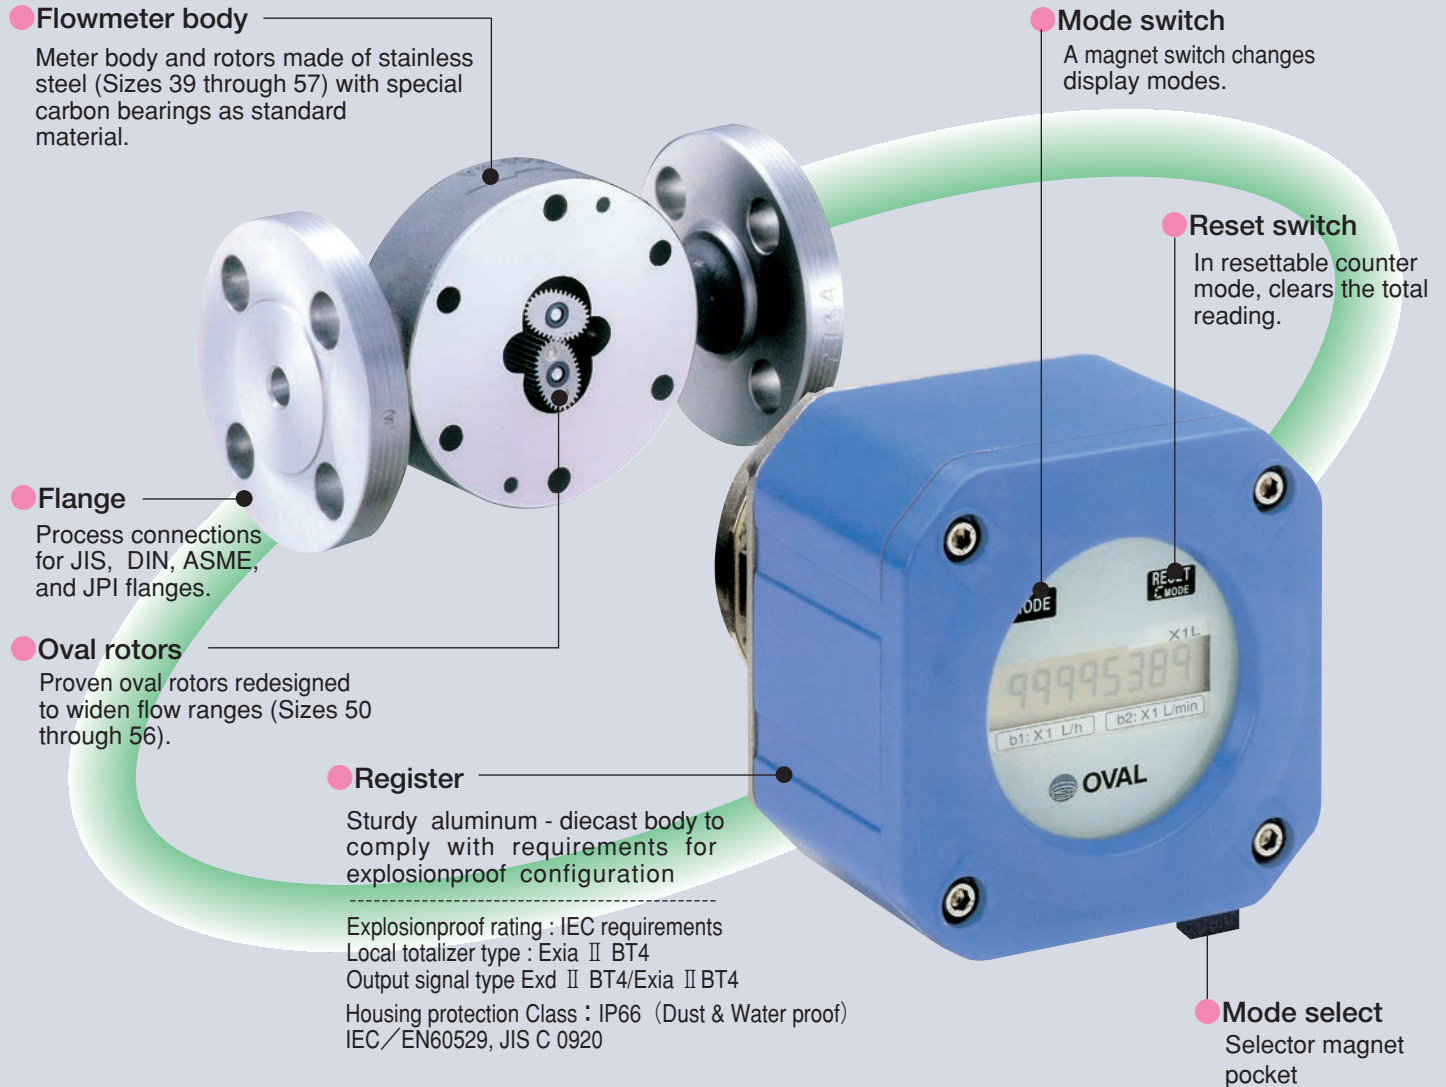


Receiving Instruments Hookup

The ULTRA OVAL in standard configuration comes in 10 models, including battery powered LCD type (without remote output) and those with analog/pulse outputs. The "Smart" type has two outputs-pulse and analog signal; communications are superimposed over the analog signal.

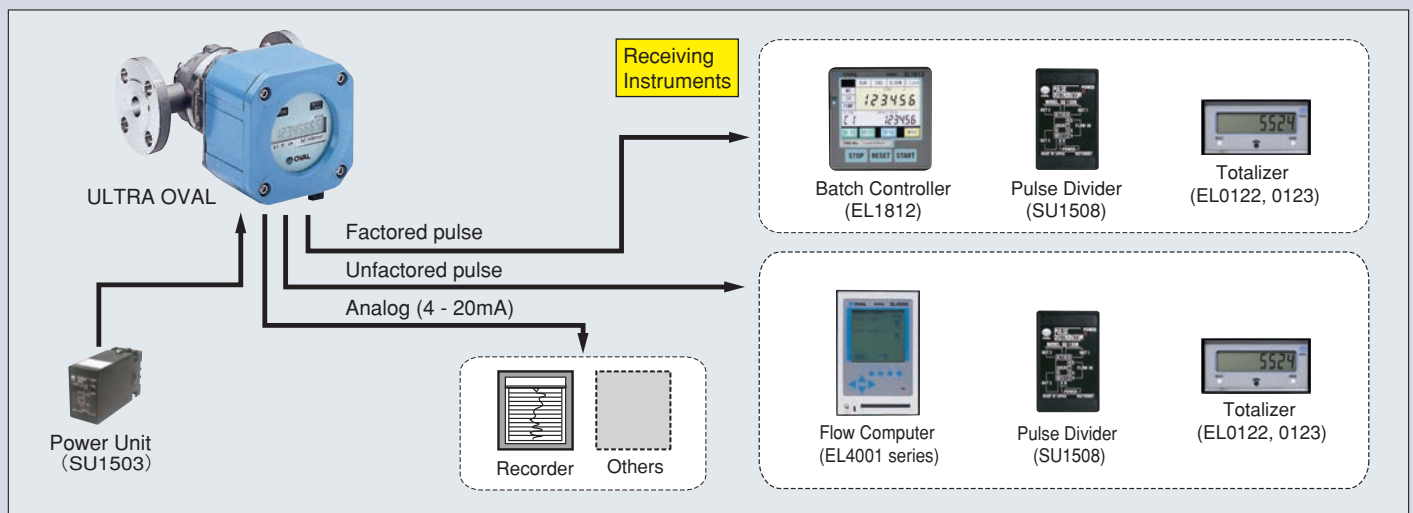

LCD Counter Displays (standard ULTRA OVAL flowmeter)

Holding a selector magnet near the label "Mode" scrolls through available variables and parameters as shown below:

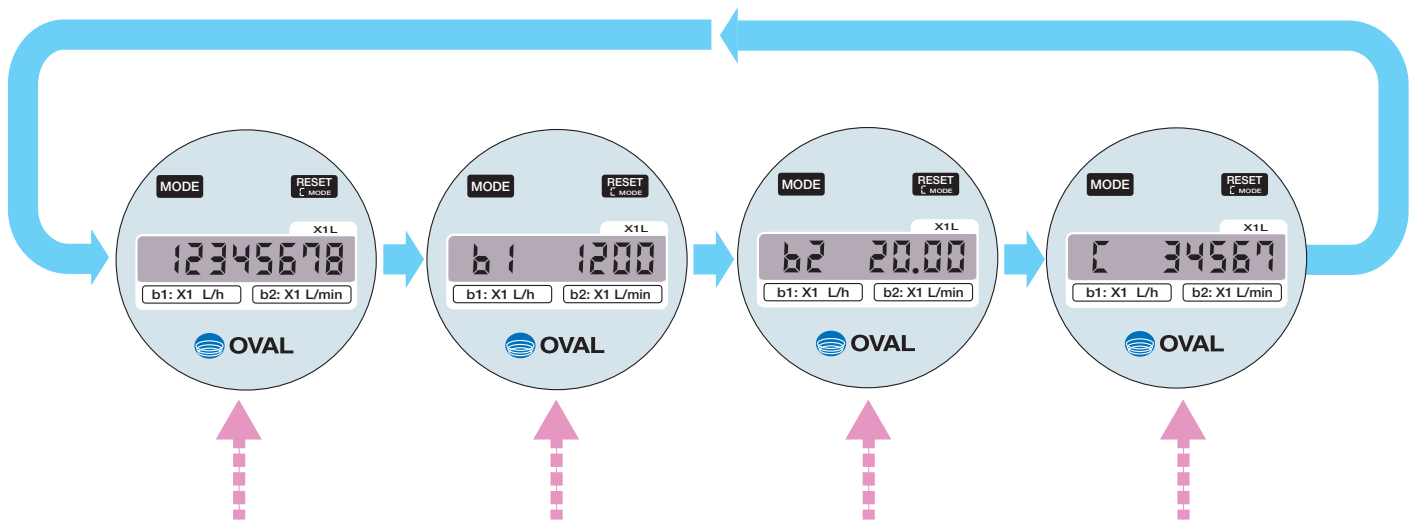

① Accumulated total flow

An accumulated total flow of 1234567.8L is shown here.

② Instantaneous flowrate (b1)

With "b1" shown at left, the hourly flowrate appears. The display shows an hourly flowrate of 12000L/h here.

③ Instantaneous flowrate (b2)

With "b2" shown at left, the flowrate per minute appears. The display shows a flowrate per minute of 200L/min here.

④ Resettable counter

With "C" shown at left, the display reads in the resettable total count mode. Holding the selector magnet near the label "RESET" resets the reading to zero, permitting the counter to restart from 0. However, irrespective of reset operation in this mode, the accumulated total count is retained. Here, the display shows, after a reset, a total flow of 3456.7L.

Meter Specifications

Item Meter size	Nom. Size mm	Linearity	Flow range m ³ /h ※1	Meter factor mL/P ※2	Material			Ccnnection	Max. operating press. ※3	Max. operating press. range	
					Body	Rotor	Bearing				
39	10	±0.35% or ±0.15%	0.2 to 12L/h	0.09838	Stainless steel	Special carbon	Special carbon · Ceramic	JIS or ASME/JPI Flange conection	2.94MPa	St'd. : -10 to +120°C	
41			1 to 60L/h	0.4896							
45			5 to 420L/h	1.2339							
50	20		0.03 to 2	4.968							
52			0.08 to 3.8	9.664							
53	25		0.15 to 6.4	17.513							
55			0.26 to 14	23.07							
56	40		0.6 to 24	37.33							
57			1.2 to 44	98.04							
28	50	±0.35% or ±0.15%	2 to 50	135.16	Single case : Stainless steel	Single case : Stainless steel	Single case : Carbon · Ceramic Double case : Carbon	JIS or ASME/JPI Flange conection	Single case : 1.96MPa	Single case -10 to +120°C	
29	80		4 to 90	198.62							
60	100		5 to 150	338.9							
31	100		10 to 230	629.5	Double case : Cast iron	Double case : Cast iron	Carbon		Double case : 9.51MPa	Double case St'd. : -5 to +120°C	
	150										
32	150		15 to 320	992.7	Cast iron	Stainless steel	Carbon		4.51MPa	High temp. or jacketed : 120 to 200°C	
	200										
33	150		20 to 450	1490.7	Cast steel	Stainless steel	Carbon		1.96MPa		
	200										
34	250		30 to 700	3250	Cast steel	Cast iron · Stainless steel	Carbon		1.96MPa		
65	300		50 to 1000	6423							
	350										

※1. Linearity of ±0.35%, at 5mPa·s or over.


※2. Standard model. For models for high and low temperature service and jacketed models, see respective General Specification sheets.

※3. Different by a flange standard.

Smart Series

For more sophisticated processes with communication interface

In addition to reading the measurement information, the Smart Ultra OVAL, when combined with our Smart Communication Unit (EL2310) and a PC, simplifies access to available variables and parameters, such as instantaneous flowrate, span, and meter factor, as well as setup, diagnostics, and other operations for maintenance, from the instrument room located far from the field. What's more, using an optionally available multidrop feature, a maximum of 15 transmitters may be connected to the host computer over two-wire cables to streamline field wiring.

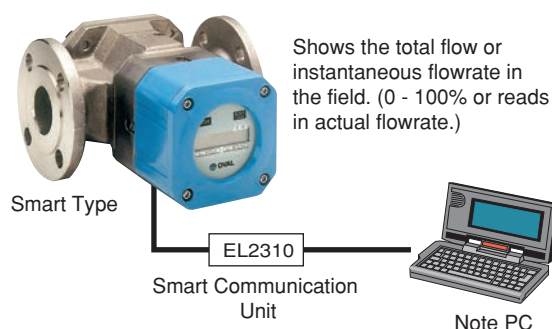

Shows the total flow or instantaneous flowrate in the field. (0 - 100% or reads in actual flowrate.)

Batch controller/register

Performs batch processes automatically! The latest batch counters for liquid service at the point of measurement

Features

- Top-of-the-line PD flowmeter, the ULTRA OVAL, is combined with batch control capability. When used in conjunction with an automatic ON/OFF valve, you can readily build a high price/performance local batch system.
- All pneumatic (the batch counter operates on a built-in battery.)
- You can choose between an LW74E that opens and closes the valve in a single step, or, for more precise batch processes, LW76E that opens and closes the valve in two steps.



Specifications

	LW74E	LW76E
Valve control	Pneumatic single-step open/shutoff	Pneumatic 2-step open/2-step shutoff (May be single-step mode by initial setup.)
Programming	Pushbuttons (6-digit LCD counter)	
Counter capacity (cum.)	8-digit total LCD counter	
Alarm	Low battery, overmeasurement, missing pulse (on LCD)	
Backup	Total flow, target batch setpoint (EEPROM retains them.)	
Configuration	Intrinsically safe explosionproof Exia II BT3, weathertight (IP65)	
Ambient temperature	-10 to +60°C	
Power	Dedicated lithium battery (Life 4 years approx. It depends on operating conditions.)	

Auto Temperature Compensator Equipped ULTRA Register


ULTRA Register finds extensive use in transactions of petroleum products, or elsewhere where flow measurement under given reference temperature is required. It converts the flow information of process material at the process temperature to that at the reference temperature. Can mount on any ULTRA OVAL flowmeters.

Specifications

Flowmeters	ULTRA OVAL, Meter sizes: 39 to 65
Temp. Input	Platinum thermometer resistance(Pt-100 Ω)
Temp. Range for Correction	-10 to +150°C
Display	8-digit LCD
Output	2 outputs selectable from various pulse/analog signals
Calculation	Based on JIS K 2249 or JIS K 2240, and 3 α correction
Conversion Accuracy	±0.1% or better



Principle of Operation

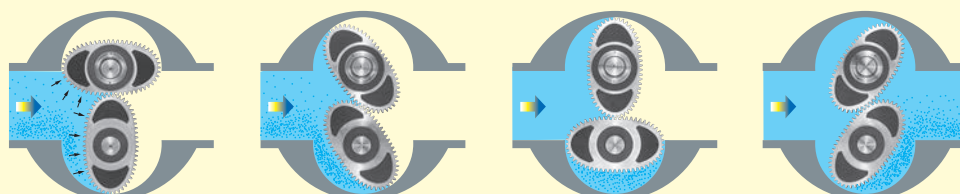

The specification as of March, 2019 is stated in this catalog. Specifications and design are subject to change without notice.



OVAL Corporation

3-10-8 Kamiuchiai, Shinjuku-ku, Tokyo 161-8508
Phone: +81 3-3360-5121 FAX: +81 3-3365-8605

<http://www.oval.co.jp/english>



0102 1903 0910S (1000)